



Enclosures & Cabinets for Special Requirements
comercial@delvalle.es | www.delvallebox.com

MODULAR DISTRIBUTION WALL CABINETS

TITAN SERIES IP66



STAINLESS
ANTICORROSIVE
GUARANTEE



MECHANICAL PARTS
GUARANTEE





WE PUT AT YOUR DISPOSAL

We offer over **45 years** providing solutions to demanding customers who require very specific characteristics and behaviour according to the sector and their needs.

WHEREVER YOU GO

We are committed to working closely with our customers, providing them with **exceptional service** and offering an advanced and extensive range of products with very competitive prices.

HIGH STANDARD OF QUALITY AND SERVICES

We only use materials provided by companies who offer the very **highest quality**, suitable and certified products. Our success is due to top quality assurance: ISO 9001, SGS, UL, TÜV, ISO 14000 and Ohsas 18001.

CUSTOMIZE TOTALLY YOUR ENCLOSURE

Our production systems can give custom-made solutions **on demand**. Every colour from RAL chart is available to be personalized. A variety of protection standards thanks to our own painting facilities.

CONTACT US

Confidentiality, reliability & quality

www.delvallebox.com
comercial@delvalle.es
 +34 945 601 381

ALSO ONLINE

Please contact our technical sales department

A team of professionals with high experience and ability to solve all your queries



MODULAR DISTRIBUTION WALL CABINETS

TITAN SERIES IP66



Examples



Perfect Sealing and Impact Resistance

Enclosure made with modular profile, able to withstand electrical and mechanical high voltages, a unique design made in A304L stainless steel (polished) with a capacity up to 624 modules in a single enclosure.

Our system consists in a stainless steel perforated profile, welded to provide great robustness and the best quality in the market. Doors are hinged and easily removable with an opening of 120°, the sides, rear, top and bottom are also removable with screws.

Easily adaptable, it offers a great advantage: versatility, along with a host of accessories as, for instance, the mounting plates for DXP elements. They use an innovative fastening system: they slide on a guide and are secured by a locking tab at the proper depth for the correct positioning of the machine and its accessories.

The rows are standard tops 150mm. Transparent polycarbonate door combines high impact resistance (250 times stronger than glass) with excellent fire resistance (UL94). With UV protection and suitable for outdoor applications.

Titan Series is also available in mild steel (painted).

➔ [FOR MORE INFORMATION CLICK HERE](#)

APPLICATIONS

Specially designed for all types of low-voltage switchboards, secondary or tertiary terminals and industrial environments. Also for residential, tertiary and industrial environments up to 1000A. For environments where aesthetics is required and also durability and superior cleaning for painted enclosures or outdoor installations.

NORMATIVE

- Properties blind door:
 - IP66 (IP55 for 2 doors) according to IEC EN 62208 and EN 60529.
 - Degree resistance IK10 according to IEC 62208 and EN 50102.
 - UL Nema 4x, 12, 3r, 1. File N° E342220.
- Properties transparent polycarbonate door:
 - IP55 according to IEC EN 62208 and EN 60529.
 - Degree IK7 resistance according to IEC 62208 and EN 50102.
 - Light transmission of 89% and protection from UV rays.
 - Resistance to fire: UL94.
 - Fire classification: BS476 part 7, class 1A (5 and 6 mm)
- A system which allows making distributions according to EN 60439-1 standard.
- Manufactured following EU low voltage ruling 2014/35/UE.
- Materials intended to come into contact with food EC 1935/2004 and RoHs compliant.
- Maximum voltage 1000 V.
- Temperature resistant: -40°C +100°C (short time +160°C).
- Option silicone gasket: from -60°C to +180°C (short time up to +350°C).

ADVANTAGES


- Wide view of the modules, mounting space and great accessibility.
- Modular design: enclosures can be assembled together.
- Supports up to 1000 A and allow sealing to IP66 (on request and with full doors).
- Two options: blind door or transparent polycarbonate door.
- Wide range of dimensions of width and depth to allow total flexibility in the structures link.
- Welded structure which gives great resistance and strength.
- 100 % steel, from the handle to the open system.
- Standard enclosures include a closing system with handle and three or four locking points.
- Gaskets guarantee complete sealing.
- Delvalle makes any size according to your needs.

OPTIONS

- Made to measure based on your needs with the possibility to join several modules.
- Plinths/base.
- Eyebolt.
- Swing rack.
- All types of ventilation.
- Cable entry cover.
- Metal legs and wheels.
- Transparent tempered glass or with safety glass.
- Manufactured in stainless steel AISI 316L EN 14404.
- Mounting plate insulation (bakelite) or stainless steel.
- EMC version according to 2014/30/UE of electromagnetic compatibility.

PLAN

CLICK HERE TO DOWNLOAD
THE FILES CAD - PLANS - CERTIFICATES

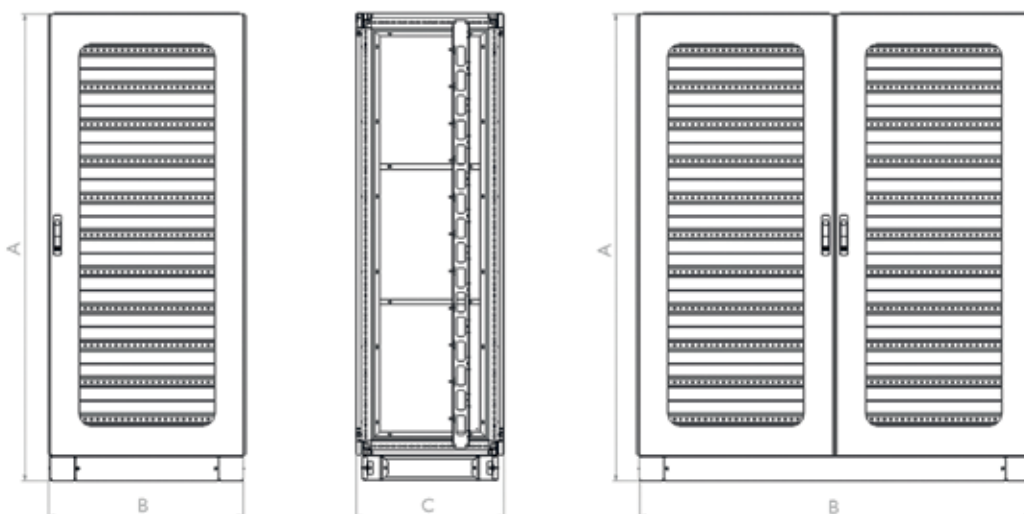

10
YEARS

STAINLESS
ANTICORROSIVE
GUARANTEE

5
YEARS

MECHANICAL PARTS
GUARANTEE

REFERENCES 1 DOOR

REFERENCES	DIMENSIONS (mm)					
BLIND DOOR	HEIGHT -A-	WIDTH -B-	DEPTH -C-	ROWS	MODULES BY ROW	TOTAL MODULES
MVAFI26040Q	1200	600	400	7	22	154
MVAFI26060Q			600			
MVAFI26080Q			800			
MVAFI28040Q			400		33	231
MVAFI28060Q	1400	800	600	8		
MVAFI28080Q			800			
MVAFI46040Q			400			
MVAFI46060Q			600		22	176
MVAFI46080Q	1600	600	800	9		
MVAFI48040Q			400			
MVAFI48060Q			600		33	264
MVAFI48080Q			800			
MVAFI66060Q	1800	800	600	11	22	198
MVAFI66080Q			800			
MVAFI68060Q			600		33	297
MVAFI68080Q			800			
MVAFI86040Q	2000	600	400	12	22	242
MVAFI86050Q			500			
MVAFI86060Q			600			
MVAFI86080Q			800			
MVAFI88040Q	2200	800	400	13	33	363
MVAFI88050Q			500			
MVAFI88060Q			600		44	484
MVAFI81040Q			400		44	484
MVAFI81050Q	2400	1000	500	14	44	484
MVAFI81060Q			600		44	484
MVAFI81240Q			400			
MVAFI81250Q			500		55	605
MVAFI81260Q	2600	1200	600	15		
MVAF206040			400			
MVAF206050			500		22	246
MVAF206060			600			
MVAF206080	2800	800	800	16		
MVAF208040			400			
MVAF208050			500		33	396
MVAF208060			600			
MVAF208080	3000	1000	800	17		
MVAF201040			400		44	528
MVAF201050			500		44	528
MVAF201060			600		44	528
MVAF201080	3200	1200	800	18		
MVAF226060			600		22	286
MVAF226080			800			
MVAF228060			600		33	429
MVAF228080	3400	1400	800	19		
MVAF221060			600		44	572
MVAF221080			800			

Version Norms UL Add "UL" to the reference. Ex "MVAFI26040UL"



REFERENCES 2 DOORS

REFERENCES	DIMENSIONS (mm)					
BLIND DOOR	HEIGHT -A-	WIDTH -B-	DEPTH -C-	ROWS	MODULES BY ROW	TOTAL MODULES
MVAFI81050/2Q	1800	1000	500	11	37	407
MVAFI81060/2Q			600		37	407
MVAF208010/2	2000	800	1000	12	26	312
MVAF201040/2			400		37	444
MVAF201050/2		1000	500		37	444
MVAF201240/2			400			
MVAF201250/2	2200	1200	500	13	48	576
MVAF201260/2			600			
MVAF201280/2		1400	800			
MVAF221080/2			800		37	481
MVAF221260/2	2400	1600	600	14	48	624
MVAF221280/2			800			

Version Norms UL Add "UL" to the reference. Ex "MVAFI26040UL"



**Consult us
without obligation**

Confidentiality, reliability & quality

DELVALLE OFFERS CUSTOMIZED SOLUTIONS

➔ **FOR MORE INFORMATION CLICK HERE**

www.delvallebox.com

comercial@delvalle.es

+34 945 601 381

ALSO ONLINE

**STAINLESS STEEL
INDUSTRIAL ENCLOSURES**



**OUTDOOR HEAVY DUTY
ELECTRICAL ENCLOSURES**



**OUTDOOR TELECOM 19
RACKS & CABINETS**



**GALVANIZED STEEL
ELECTRICAL ENCLOSURES**



HYGIENIC DESIGN ENCLOSURES



**ALUMINIUM ELECTRICAL
ENCLOSURES**



DELVALLE OFFERS CUSTOMIZED SOLUTIONS

➔ **FOR MORE INFORMATION CLICK HERE**

www.delvallebox.com

comercial@delvalle.es

+34 945 601 381

ALSO ONLINE

WATERPROOF SHEET STEEL ELECTRICAL ENCLOSURES



CLIMATE CONTROL COOLING FOR ELECTRICAL ENCLOSURES



NEMA ELECTRICAL ENCLOSURES TYPE 1-3R-4X-12



MODULAR DISTRIBUTION ENCLOSURES



EMC ELECTRICAL ENCLOSURES SOLUTIONS



CABLE GLANDS & ENTRY SEALS FOR CABINETS





Enclosures & Cabinets for Special Requirements



Paso del Prao, 6. 01320 Oyón (Álava). Spain

P. +34 945 601 381

www.delvallebox.com - comercial@delvalle.es

Contact us, we will be available at any time

