



Enclosures & Cabinets for Special Requirements
comercial@delvalle.es | www.delvallebox.com

STAINLESS STEEL SEISMIC LUXOR ENCLOSURE SEISCORE SERIES

IP66



STAINLESS
ANTICORROSIVE
GUARANTEE



MECHANICAL PARTS
GUARANTEE





WE PUT AT YOUR DISPOSAL

We offer over **45 years** providing solutions to demanding customers who require very specific characteristics and behaviour according to the sector and their needs.

WHEREVER YOU GO

We are committed to working closely with our customers, providing them with **exceptional service** and offering an advanced and extensive range of products with very competitive prices.

HIGH STANDARD OF QUALITY AND SERVICES

We only use materials provided by companies who offer the very **highest quality**, suitable and certified products. Our success is due to top quality assurance: ISO 9001, SGS, UL, TÜV, ISO 14000 and Ohsas 18001.

CUSTOMIZE TOTALLY YOUR ENCLOSURE

Our production systems can give custom-made solutions **on demand**. Every colour from RAL chart is available to be personalized. A variety of protection standards thanks to our own painting facilities.

CONTACT US

Confidentiality, reliability & quality

www.delvallebox.com
comercial@delvalle.es
 +34 945 601 381

ALSO ONLINE

Please contact our technical sales department

A team of professionals with high experience and ability to solve all your queries



STAINLESS STEEL SEISMIC LUXOR ENCLOSURE

SEISCORE SERIES

IP66



Examples



More Resistance Tanks to Structural Reinforcement for Maximum Durability

Seismic reinforced enclosure, single or double door; manufactured in stainless steel AISI 304L, EN 1.4306 finely polished, to IP55 or IP66.

The design with structural reinforcements and special hinges on high resistance doors, allows our reinforced electrical cabinets to resist large weights both on the structure and on the doors, whilst also housing heavy elements inside.

The seismic cabinets have been vigorously tested and have withstood tests for the strongest seismic activity, offering the customer high level protection in areas where seismic activity is a possibility.

They can be installed outdoors, with vandal proof duraluminium lever lock.

The seismic cabinet is provided with exterior plastic protection which prevents scratches when handling and positioning the automats inside the cabinet. This cover can be easily removed at the customer's premises. Optionally rack mountable panel.

[➔ FOR MORE INFORMATION CLICK HERE](#)

APPLICATIONS

Specially designed for areas where they will be subject to constant vibration or high seismic stress.

STAINLESS STEEL SEISMIC LUXOR ENCLOSURE

SEISCORE SERIES

IP66

ADVANTAGES

- Broad assembly area with great accessibility.
- Great strength as a whole.
- Door opens to 120°, standard door opening to the left specify for a right side.
- Standard with toggle clasp made of stainless steel.
- Great versatility, so it can be applied to almost any field.
- Delvalle supplies any measurements required including custom built holes and cut outs both for the door and enclosure.
- Distributed load 1000 kg.

NORMATIVE

- IP66 (W) Norm IEC EN 62208 EN 60529.
- Maximum IK10 resistance Norm IEC 62208 and EN 50102
- Our electrical panels are built to CE standards 2014/35/UE.
- Seismic qualification specification certificates 8484-CE-005-E.
- Norm IEEE-344, Institute of American electrical and electronic Engineers. RoHs compliant.
- UL approval Nema 4x, 12, 3r, 1. N° File E342220.
- Norm UNE EN 60068-3-3 Environment at and seismic testing methods.
- Maximum voltage 1000 V.
- Temperature resistant: -40°C +100°C (short time +160°C).
- Option silicone gasket: from -60°C to +180°C (short time up to +350°C).
- Regulations Board of the Nuclear Security.

OPTIONS

- Earthquake-resistant design, seismic testing under standar UNE EN 60068-3-3.
- Up to IP69K -DIN 40050-9.
- Special individual solutions.
- More resistance tanks to structural reinforcement for maximum durability.
- Stainless steel AISI 316L.
- Painted steel.
- Broad assembly area with great accessibility.
- Great strength as a whole.
- Standard with toggle clasp made of stainless steel.

SEISMIC NORMATIVE

- NEBS GR-63-CORE
- United States (ASCE 7)
- European (EN 1998 - Eurocode 8)




STAINLESS STEEL SEISMIC LUXOR ENCLOSURE

SEISCORE SERIES

IP66

PLAN

➔ [CLICK HERE TO DOWNLOAD THE FILES CAD - PLANS - CERTIFICATES](#)

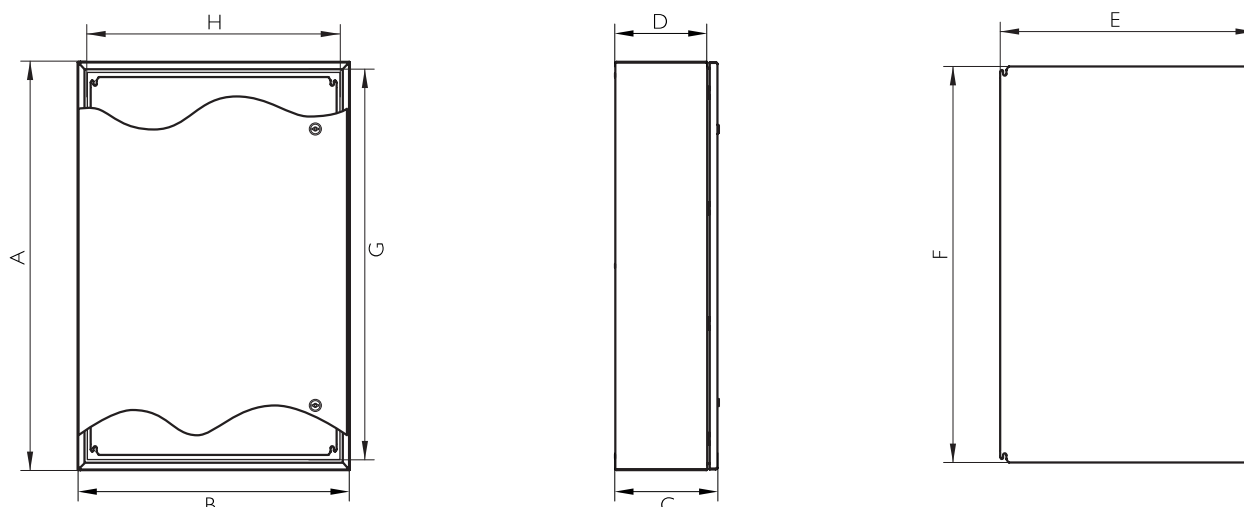

REFERENCES SERIES SEISCORE LUXOR

REFERENCIAS	DIMENSIONES (mm)					
BLIND DOOR (x)	HEIGHT -A-	WIDTH -B-	DEPTH -C-	ACCESS -GxH-	INSIDE DEPTH -D-	PLATE MEASUREMENT -ExF-
MVAB302015	300	200	155	260x153	125	264x147
MVAB383015	380	300	155	340x253	125	344x247
MVAB383021	380	300	210	340x253	180	344x247
MVAB404021	400	400	210	360x353	180	364x347
MVAB504021	500	400	210	460x353	180	464x347
MVAB505021	500	500	210	460x453	180	464x447
MVAB705021	700	500	210	660x453	180	664x447
MVAB604021	600	400	210	560x353	180	564x347
MVAB605021	600	500	210	560x453	180	564x447
MVAB606021	600	600	210	560x553	180	564x547
MVAB806030	800	600	300	760x553	270	764x547
MVAB808030	800	800	300	760x753	270	764x747
MVAB108030	1000	800	300	960x753	270	964x747
MVAB128030	1200	800	300	1160x753	270	1164x747
MVAB101030	1000	1000	300	960x953	270	964x947
MVAC121030	1200	1000	300	1090x890	275	1070x870
MVAC101230	1000	1200	300	890x1090	275	870x1070
MVAC121230	1200	1200	300	1000x1000	275	1070x1070
Versión: Normative UL	Add "UL" to the reference. Ex "MVAB302015UL"					
Versión: IP69K	Add "I69" to the reference Ex "MVAB302015/I69"					

The dimensions indicated are approximate. Enclosures can be manufactured in any size upon request.
They can be constructed with a thickness of up to 4 mm. Bottom plate separation 20 mm.

DELVALLE OFFERS OTHER SOLUTIONS

➔ FOR MORE INFORMATION CLICK HERE

www.delvallebox.com

comercial@delvalle.es

+34 945 601 381

ALSO ONLINE

STAINLESS STEEL INDUSTRIAL ENCLOSURES



OUTDOOR HEAVY DUTY ELECTRICAL ENCLOSURES



OUTDOOR TELECOM 19 RACKS & CABINETS



GALVANIZED STEEL ELECTRICAL ENCLOSURES



HYGIENIC DESIGN ENCLOSURES



ALUMINIUM ELECTRICAL ENCLOSURES



DELVALLE OFFERS OTHER SOLUTIONS

➔ [FOR MORE INFORMATION CLICK HERE](#)

www.delvallebox.com

comercial@delvalle.es

+34 945 601 381

ALSO ONLINE

WATERPROOF SHEET STEEL ELECTRICAL ENCLOSURES



CLIMATE CONTROL COOLING FOR ELECTRICAL ENCLOSURES



NEMA ELECTRICAL ENCLOSURE TYPE 1-3R-4X-12



MODULAR DISTRIBUTION ENCLOSURES



EMC ELECTRICAL ENCLOSURES SOLUTIONS




CABLE GLANDS & ENTRY SEALS FOR CABINETS





Enclosures & Cabinets for Special Requirements

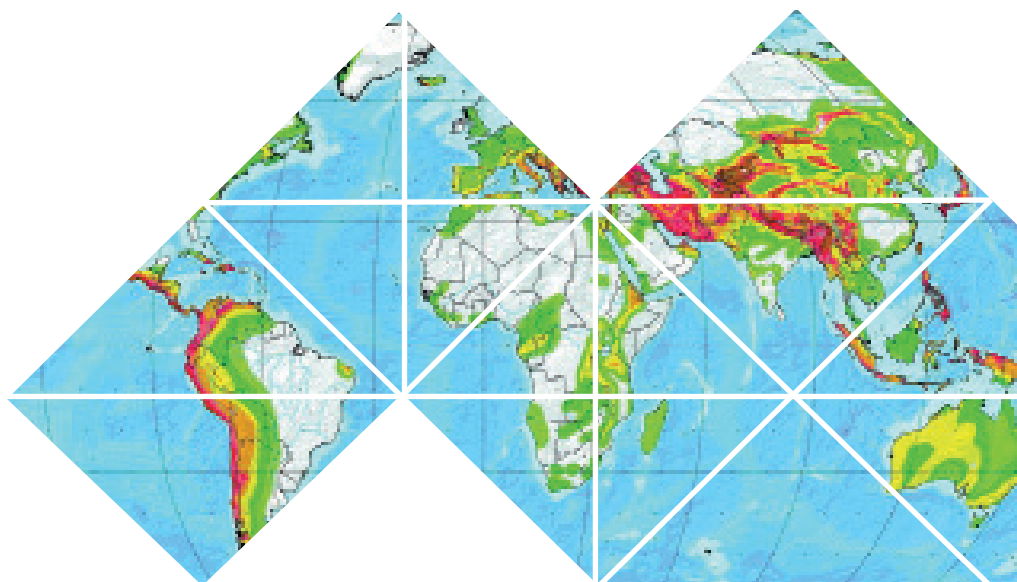

Paso del Prao, 6. 01320 Oyón (Álava). Spain

P. +34 945 601 381

www.delvallebox.com - comercial@delvalle.es

Contact us, we will be available at any time

