



INDUSTRIAL ENCLOSURE SOLUTIONS

comercial@delvalle.es | www.delvallebox.com

PANORAMIC WALL MOUNTED STAINLESS STEEL CABINET

LUXOR TEDEO SERIES IP66



STAINLESS
ANTICORROSIVE
GUARANTEE



MECHANICAL PARTS
GUARANTEE





WE PUT AT YOUR DISPOSAL

We offer over **50 years** providing solutions to demanding customers who require very specific characteristics and behaviour according to the sector and their needs.

WHEREVER YOU GO

We are committed to working closely with our customers, providing them with **exceptional service** and offering an advanced and extensive range of products with very competitive prices.

HIGH STANDARD OF QUALITY AND SERVICES

We only use materials provided by companies who offer the very **highest quality**, suitable and certified products. Our success is due to top quality assurance: ISO 9001, SGS, UL, TÜV, ISO 14000 and Ohsas 18001.

CUSTOMIZE TOTALLY YOUR ENCLOSURE

Our production systems can give custom-made solutions **on demand**. Every colour from RAL chart is available to be personalized. A variety of protection standards thanks to our own painting facilities.



100%
*Entirely designed
and manufactured
in Europe*

CONTACT US

Confidentiality, reliability & quality

www.delvallebox.com

comercial@delvalle.es

+34 945 601 381

ALSO ONLINE

Please contact our technical sales department

A team of professionals with high experience and ability to solve all your queries



PANORAMIC WALL MOUNTED STAINLESS STEEL CABINET

LUXOR TEDEO SERIES IP66



Examples



Delvalle Supplies any Measurements Required

Delvalle knows the needs of our customers and for this we've created the panoramic wall mounted LuxorTedeo Series completely stainless steel cabinet, with two or three doors AISI 304L EN 14306. The cabinet design follows the same philosophy of sealing and strength as our other electrical cabinets but this time focusing on their horizontal integration in the machinery use for both above and below use. High performance stainless steel used to offer quality, reliability and consistency and by following strict manufacture controls without forgetting the satin or brushed finish and the option of RAL 7035 polyester painting make it ideal for outside use.

➔ [FOR MORE INFORMATION CLICK HERE](#)



APPLICATIONS

Especially designed for maximum flexibility in use. Thanks to its versatility it can be used in the food and pharmaceuticals industries, where hygiene is essential, as in petrochemical, electrical, industries where total sealing is essential and also in general industrial environments always offering a long life.



ADVANTAGES

- Supplied with protective film which prevents scratches and abrasions during handling.
- It integrates into the machine horizontally
- Can be placed at the top or bottom.
- Two ways of opening sideways or upwards using a hydraulic door mechanism in each case.
- The standard stainless steel electrical panel comes with 90° double bit locks, 3 fixing points and hidden hinges
- Delvalle supplies any measurements required including custom built holes and cut outs both for the door and enclosure

OPTIONS


- Custom made based on your needs.
- With the possibility to join several modules.
- Plinths at base
- Eyebolt (not included in standard model).
- Swing rack.
- All types of ventilation.
- Cable entry cover at base.
- Metal legs and wheels.
- Up to IP69K -DIN 40050-9.
- Transparent polycarbonate door, with tempered glass or with safety glass.
- Finished in textured paint RAL on request.
- Mounting plate insulator (bakelite) or painted steel.
- Manufactured in stainless steel AISI 316L, EN 14404.
- EMC version according to 2014/30/UE of electromagnetic compatibility.

NORMS

- IP66 (W) (IP55 double door without mounting, IP66 with central welded bar mounting) Norm IEC 60529.
- Maximum IK10 resistance Norm IEC 62262.
- Manufactured following EU low voltage ruling 2014/35/UE.
- RoHS Directive 2011/65/UE compliant.
- UL approval Nema 4x, 12, 3r, 1. N° File E342220.
- Maximum voltage 1000V
- Temperature resistant: -40°C +80°C (short time +160°C).

PLAN

CLICK HERE TO DOWNLOAD THE FILES CAD - PLANS - CERTIFICATES

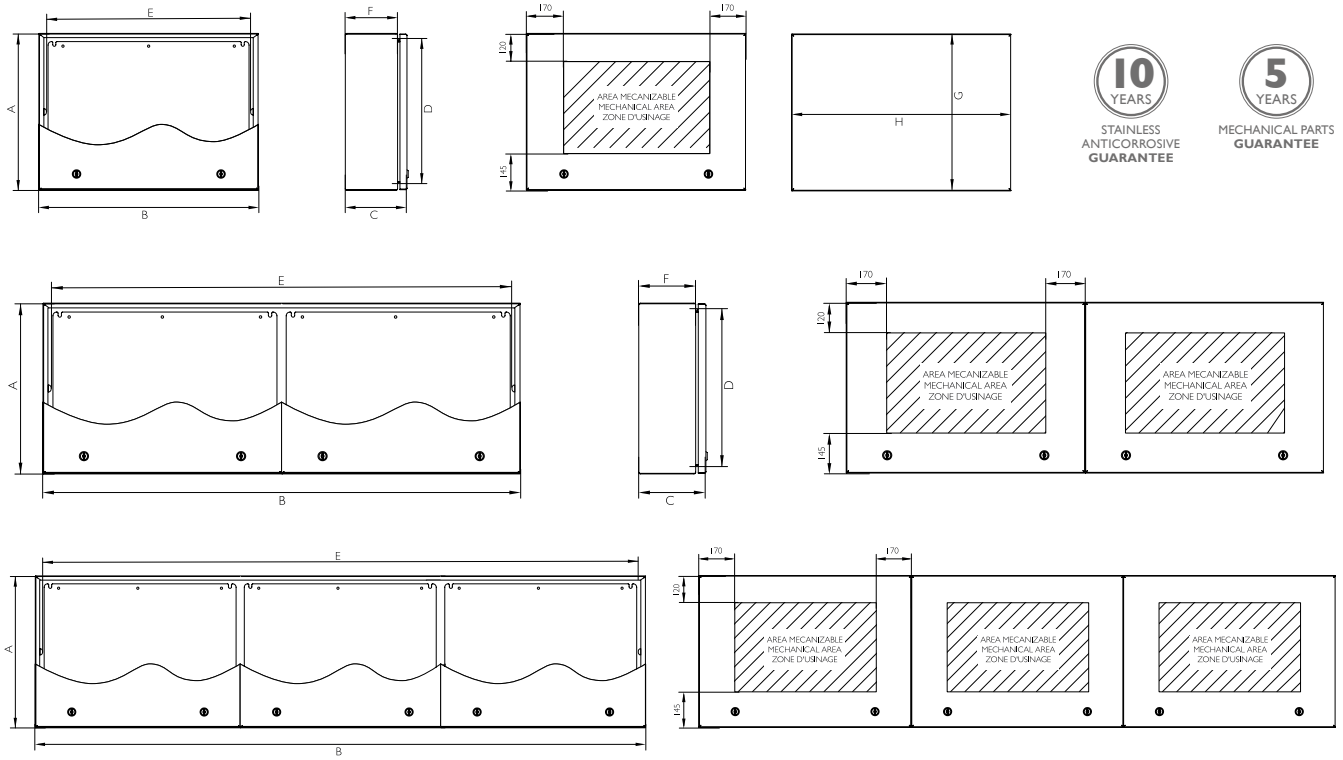

REFERENCES

| REFERENCES | | DIMENSIONS (mm) | | | | | | | | | |
|---------------------------|--|-----------------|-------------|-------------|---------------------|--------------------|--------------------|--|---------------------|------------|-------------|
| BLIND DOOR | N° DOORS | HEIGHT - A - | WIDTH - B - | DEPTH - C - | INSIDE HEIGHT - D - | INSIDE WIDTH - E - | INSIDE DEPTH - F - | MECHANABLE SIDE AREA (F-15mm per side) | PLATE MEASURE -GxH- | POIDS (Kg) | VOLUME (m³) |
| TD505030 | 1 | 500 | 500 | 300 | 446 | 400 | 270 | 240 | 447x464 | 20,14 | 0,08 |
| TD507530 | 1 | 500 | 750 | 300 | 446 | 650 | 270 | 240 | 447x714 | 26,15 | 0,12 |
| TD501030 | 1 | 500 | 1000 | 300 | 446 | 900 | 270 | 240 | 447x964 | 32,17 | 0,16 |
| TD501230 | 1 | 500 | 1250 | 300 | 446 | 1150 | 270 | 240 | 447x1214 | 38,19 | 0,21 |
| TD501530 | 1 | 500 | 1500 | 300 | 446 | 1400 | 270 | 240 | 447x1464 | 44,21 | 0,24 |
| TD501030.2P | 2 | 500 | 1000 | 300 | 446 | 900 | 270 | 240 | 440x440 (2) | 32,97 | 0,16 |
| TD501230.2P | 2 | 500 | 1200 | 300 | 446 | 1100 | 270 | 240 | 440x540 (2) | 38,73 | 0,20 |
| TD501430.2P | 2 | 500 | 1400 | 300 | 446 | 1300 | 270 | 240 | 440x640 (2) | 44,48 | 0,23 |
| TD501630.2P | 2 | 500 | 1600 | 300 | 446 | 1500 | 270 | 240 | 440x740 (2) | 50,24 | 0,26 |
| TD501830.2P | 2 | 500 | 1800 | 300 | 446 | 1700 | 270 | 240 | 440x840 (2) | 55,99 | 0,29 |
| TD502030.2P | 2 | 500 | 2000 | 300 | 446 | 1900 | 270 | 240 | 440x940 (2) | 61,75 | 0,33 |
| TD502230.3P | 3 | 500 | 2250 | 300 | 446 | 2150 | 270 | 240 | 440x690 (3) | 68,94 | 0,37 |
| TD502530.3P | 3 | 500 | 2500 | 300 | 446 | 2400 | 270 | 240 | 440x773,3 (3) | 76,14 | 0,41 |
| TD503030.3P | 3 | 500 | 3000 | 300 | 446 | 2900 | 270 | 240 | 440x940 (3) | 90,53 | 0,49 |
| Version: Norm UL | Add "UL" to reference. Ex. "TD501030UL" | | | | | | | | | | |
| Version: Transparent door | Add "T" to reference. Ex. "TD501030T" "TD501030T2P" "TD502230T.3P" | | | | | | | | | | |

Separation depth plate 20mm

CUSTOMIZED ENCLOSURE SOLUTIONS DELVALLE

Delvalle has more than 50 years of experience using the latest technology to implement and obtain the most innovative products on offer to all our customers. Delvalle is an ideal partner, combining an advanced and wide range of products at very competitive prices.

The customized manufacture of all electrical enclosures and cabinets Delvallebox is carry out with the most advanced technical methods and with the precision and consciousness of a craftsman. This makes the difference from competitors and is the best way to gain our customers' trust.

In Delvallebox we bear in mind that customers perceive the quality very clearly. In every product (for instance, in the cabinets here presented) safety and useful solutions are what customers value most.



STAINLESS STEEL
INDUSTRIAL ENCLOSURES



OUTDOOR ELECTRICAL
ENCLOSURES



GLOBAL ELECTRICAL
SOLUTIONS FOR URBAN AREAS



GALVANIZED STEEL
ELECTRICAL ENCLOSURES

ATEX INDUSTRIAL ENCLOSURES




SLOPED ROOF ENCLOSURES - HYGIENIC



INDUSTRIAL ENCLOSURES IP66, IP67, IP68 AND IP69K

Buy direct from manufacturer of custom made IP66, IP67, IP68 and IP69K heavy duty industrial and waterproof electrical enclosures AISI 304L and 316L made by standard IEC 60529. Delvalle has tested all sizes and dimensions of waterproof enclosures according to EN 60529:2018. All weather resistant enclosures are more than simply rainproof, they meet a minimum of Nema 4X and IP66, IP67, IP68 and IP69k requirements to ensure your electronics are protected. From Junction boxes to industrial enclosures, Delvalle weatherproof enclosures offer a wide range of sizes and styles to keep your project waterproof.

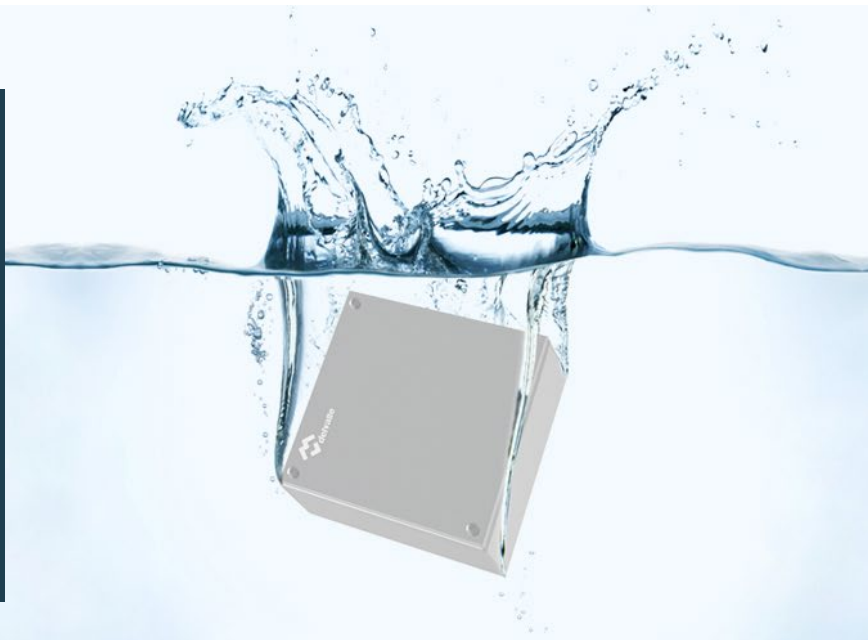

CLIMATE CONTROL COOLING FOR ENCLOSURES



CABLE GLANDS FOR ELECTRICAL ENCLOSURES





Paso del Prao, 6. 01320 Oyón (Álava). Spain
Phone +34 945 601 381
comercial@delvalle.es | www.delvallebox.com
Contact us, we will be available at any time

