



Enclosures & Cabinets for Special Requirements
comercial@delvalle.es | www.delvallebox.com

MODULAR PAINTED GALVANIZED STEEL ENCLOSURE

TITAN SERIES IP66



MECHANICAL PARTS
GUARANTEE





WE PUT AT YOUR DISPOSAL

We offer over **45 years** providing solutions to demanding customers who require very specific characteristics and behaviour according to the sector and their needs.

WHEREVER YOU GO

We are committed to working closely with our customers, providing them with **exceptional service** and offering an advanced and extensive range of products with very competitive prices.

HIGH STANDARD OF QUALITY AND SERVICES

We only use materials provided by companies who offer the very **highest quality**, suitable and certified products. Our success is due to top quality assurance: ISO 9001, SGS, UL, TÜV, ISO 14000 and Ohsas 18001.

CUSTOMIZE TOTALLY YOUR ENCLOSURE

Our production systems can give custom-made solutions **on demand**. Every colour from RAL chart is available to be personalized. A variety of protection standards thanks to our own painting facilities.

CONTACT US

Confidentiality, reliability & quality

www.delvallebox.com
comercial@delvalle.es
 +34 945 601 381

ALSO ONLINE

Please contact our technical sales department

A team of professionals with high experience and ability to solve all your queries



MODULAR PAINTED GALVANIZED STEEL ENCLOSURE

TITAN SERIES IP66



Example

Standard With Chrome Fasteners and Stainless Steel Hinges

The painted galvanized steel enclosures Titan Series are modular, fully customizable, flexible environments for food industries, petrochemical, pharmaceutical, power, which need a presence, hygiene, sealing and longer service life.

The doors are hinged and easily removable with a 120° opening, side, rear and top and bottom are removable by screws. Finished in RAL 7035, chrome fasteners and stainless steel hinges.

→ [FOR MORE INFORMATION CLICK HERE](#)



APPLICATIONS

Specially designed for outdoor installations. Due to its versatility it can be placed in the food, pharmaceutical, where hygiene is essential, as in petrochemicals, power, where the sealing is critical and industrial environments in general.

CHARACTERISTICS

- Broad assembly area and great accessibility.
- Endless choices, modules and measurements.
- Welded body, which gives it great strength.
- Side rear, top and bottom panels, easily removable.
- Door opens to 120°.
- Standard with chrome fasteners and stainless steel hinges.
- Perfect sealing thanks to gaskets used in the joints.
- Delvalle supplies any measurements required including custom built holes and cut outs both for the door and enclosure.
- Distributed load 1000 kg.
- Painted galvanized steel RAL 7035.
- Approved for outdoor installations.
- Welded structure.
- Stainless steel hinges.
- Chrome closures.

OPTIONS

- Custom made based on your needs. With the possibility to join several modules.
- Switchboard graffiti-proof paint.
- Socles. Swing rack.
- All types of ventilation.
- Eyebolt (not included in standard model).
- Cable entry cover at base.
- Metal legs and wheels.
- Transparent polycarbonate door, with tempered glass or with safety glass.
- Mounting plate insulator (bakelite) or painted steel.
- EMC version according to 2014/30/UE of electromagnetic compatibility.

NORMS


- IEC 60529 norm, IP66.
- UL approval Nema 1, 3r, 4 and 12. N° File E342220.
- IEC 62262 norm, maximum IK10 resistance.
- 2014/35/UE directive. Low voltage ruling directive.
- Maximum voltage 1000V
- Temperature resistant: -40°C +100°C (short time +160°C).
- Option silicone gasket: from -60°C to +180°C (short time up to +350°C).

REFERENCES | DOOR


REFERENCES		DIMENSIONS (mm)					
BLIND DOOR	TRANSPARENT DOOR	HEIGHT -A-	WIDTH -B-	DEPTH -C-	WEIGHT (Kg)	VOLUME (m³)	
AMCGI26040	AMCGI26040T	1200	600	400	79,75	0,31	
AMCGI26060	AMCGI26060T			600	91,51	0,46	
AMCGI26080	AMCGI26080T			800	107,1	0,61	
AMCGI28040	AMCGI28040T		800	400	98,23	0,41	
AMCGI28060	AMCGI28060T			600	110,97	0,61	
AMCGI28080	AMCGI28080T			800	127,51	0,81	
AMCGI46040	AMCGI46040T	1400	600	400	87,81	0,36	
AMCGI46060	AMCGI46060T			600	101	0,53	
AMCGI46080	AMCGI46080T			800	118,01	0,71	
AMCGI48040	AMCGI48040T		800	400	112,63	0,48	
AMCGI48060	AMCGI48060T			600	123,12	0,71	
AMCGI48080	AMCGI48080T			800	141,09	0,94	
AMCGI66040	AMCGI66040T	1600	600	400	98,14	0,41	
AMCGI66060	AMCGI66060T			600	111,41	0,61	
AMCGI66080	AMCGI66080T			800	129,82	0,81	
AMCGI68040	AMCGI68040T		800	400	121,01	0,55	
AMCGI68060	AMCGI68060T			600	135,25	0,81	
AMCGI68080	AMCGI68080T			800	154,61	1,07	
AMCGI61040	AMCGI61040T		100	400	139,78	0,68	
AMCGI61060	AMCGI61060T			600	154,98	1,01	
AMCGI61080	AMCGI61080T			800	175,31	1,34	
AMCGI61240	AMCGI61240T		120	400	158,53	0,81	
AMCGI61260	AMCGI61260T			600	174,69	1,21	
AMCGI61280	AMCGI61280T			800	195,98	1,60	
AMCGI86040	AMCGI86040T	1800	600	400	106,65	0,46	
AMCGI86050	AMCGI86050T			500	113,98	0,57	
AMCGI86060	AMCGI86060T			600	121,32	0,69	
AMCGI86080	AMCGI86080T		800	800	141,16	0,91	
AMCGI88040	AMCGI88040T			400	131,75	0,61	
AMCGI88050	AMCGI88050T			500	139,56	0,76	
AMCGI88060	AMCGI88060T		600	600	147,38	0,91	
AMCGI88080	AMCGI88080T			800	168,19	1,21	
AMCGI81040	AMCGI81040T			1000	400	139,78	0,68
AMCGI81050	AMCGI81050T		500		160,56	0,95	
AMCGI81060	AMCGI81060T		600		168,86	1,13	
AMCGI81080	AMCGI81080T		800	800	190,63	1,50	
AMCGI81240	AMCGI81240T			400	172,76	0,91	
AMCGI81250	AMCGI81250T			500	181,53	1,14	
AMCGI81260	AMCGI81260T		1200	600	190,31	1,36	
AMCGI81280	AMCGI81280T			800	213,05	1,80	
AMCG206040	AMCG206040T			2000	600	400	116,39
AMCG206050	AMCG206050T		500			124,2	0,64
AMCG206060	AMCG206060T	600	132,02			0,76	
AMCG206080	AMCG206080T	800	800		153,28	1,01	
AMCG208040	AMCG208040T		400		143,7	0,68	
AMCG208050	AMCG208050T		500		152	0,85	
AMCG208060	AMCG208060T	600	600		160,28	1,01	
AMCG208080	AMCG208080T		800		182,51	1,34	
AMCG208010	AMCG208010T		100		199,58	1,67	
AMCG201040	AMCG201040T	1000	400		165,96	0,85	
AMCG201050	AMCG201050T		500		174,73	1,05	
AMCG201060	AMCG201060T		600		183,52	1,26	
AMCG201080	AMCG201080T	800	800	206,7	1,67		
AMCG226060	AMCG226060T		600	600	141,93	0,84	
AMCG226080	AMCG226080T			800	164,63	1,11	
AMCG228060	AMCG228060T	800		800	172,38	1,11	
AMCG228080	AMCG228080T		800	196,04	1,47		
AMCG221060	AMCG221060T		1000	600	197,36	1,38	
AMCG221080	AMCG221080T	800		221,97	1,83		

MODULAR PAINTED GALVANIZED STEEL ENCLOSURE TITAN SERIES IP66

PLAN

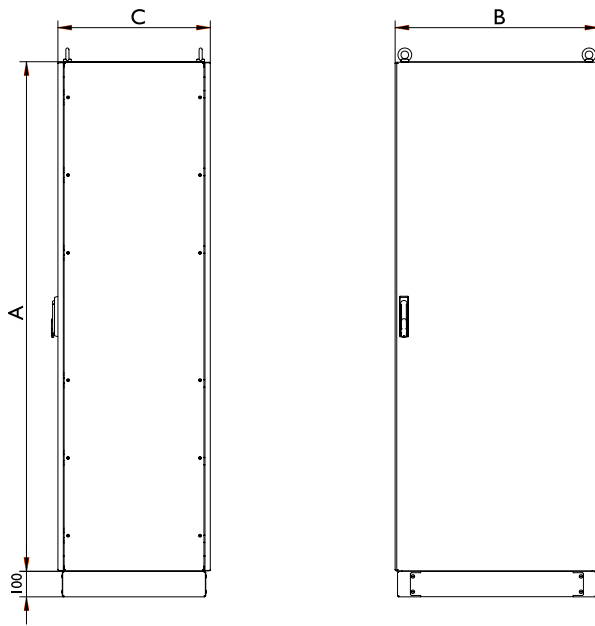

CLICK HERE TO DOWNLOAD
THE FILES CAD - PLANS - CERTIFICATES

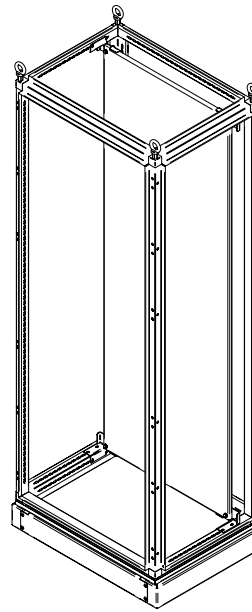

5
YEARS
MECHANICAL PARTS
GUARANTEE

REFERENCES 2 DOORS

REFERENCES		DIMENSIONS (mm)				
BLIND DOOR	TRANSPARENT DOOR	HEIGHT -A-	WIDTH -B-	DEPTH -C-	WEIGHT (Kg)	VOLUME (m ³)
AMCG181050/2	AMCG181050/2T	1800	1000	500	166,76	0,95
AMCG181060/2	AMCG181060/2T			600	175,26	1,13
AMCG201040/2	AMCG201040/2T			400	165,96	0,85
AMCG201050/2	AMCG201050/2T	2000	1200	500	174,73	1,05
AMCG201240/2	AMCG201240/2T			400	195,03	1,02
AMCG201250/2	AMCG201250/2T			500	204,48	1,26
AMCG201260/2	AMCG201260/2T			600	213,94	1,51
AMCG201280/2	AMCG201280/2T	2200	1000	800	238,49	1,99
AMCG221260/2	AMCG221260/2T			600	229,97	1,65
AMCG221280/2	AMCG221280/2T			800	255,95	2,19
AMCG221080/2	AMCG221080/2T			800	229,84	1,83

Separation depth plate 20mm



DELVALLE OFFERS OTHER SOLUTIONS

www.delvallebox.com

comercial@delvalle.es

+34 945 601 381

ALSO ONLINE

→ FOR MORE INFORMATION CLICK HERE

STAINLESS STEEL
INDUSTRIAL ENCLOSURES



OUTDOOR HEAVY DUTY
ELECTRICAL ENCLOSURES



OUTDOOR TELECOM 19
RACKS & CABINETS



GALVANIZED STEEL
ELECTRICAL ENCLOSURES



HYGIENIC DESIGN ENCLOSURES



ALUMINIUM ELECTRICAL
ENCLOSURES



DELVALLE OFFERS OTHER SOLUTIONS

→ FOR MORE INFORMATION CLICK HERE

www.delvallebox.com

comercial@delvalle.es

+34 945 601 381

ALSO ONLINE

WATERPROOF SHEET STEEL ELECTRICAL ENCLOSURES



CLIMATE CONTROL COOLING FOR ELECTRICAL ENCLOSURES



NEMA ELECTRICAL ENCLOSURE TYPE 1-3R-4X-12



MODULAR DISTRIBUTION ENCLOSURES



EMC ELECTRICAL ENCLOSURES SOLUTIONS



CABLE GLANDS & ENTRY SEALS FOR CABINETS





Enclosures & Cabinets for Special Requirements



Paso del Prao, 6. 01320 Oyón (Álava). Spain
P. +34 945 601 381
www.delvallebox.com - comercial@delvalle.es
Contact us, we will be available at any time

