



INDUSTRIAL ENCLOSURE SOLUTIONS

comercial@delvalle.es | www.delvallebox.com

THERMOSTATS AND THERMO-HYGROSTATS





WE PUT AT YOUR DISPOSAL

We offer over **50 years** providing solutions to demanding customers who require very specific characteristics and behaviour according to the sector and their needs.

WHEREVER YOU GO

We are committed to working closely with our customers, providing them with **exceptional service** and offering an advanced and extensive range of products with very competitive prices.

HIGH STANDARD OF QUALITY AND SERVICES

We only use materials provided by companies who offer the very **highest quality**, suitable and certified products. Our success is due to top quality assurance: ISO 9001, SGS, UL, TÜV, ISO 14000 and Ohsas 18001.

CUSTOMIZE TOTALLY YOUR ENCLOSURE

Our production systems can give custom-made solutions **on demand**. Every colour from RAL chart is available to be personalized. A variety of protection standards thanks to our own painting facilities.



100%
Entirely designed
and manufactured
in Europe

CONTACT US

Confidentiality, reliability & quality

www.delvallebox.com

comercial@delvalle.es

+34 945 601 381

ALSO ONLINE

Please contact our technical sales department

A team of professionals with high experience and ability to solve all your queries



THERMOSTATS AND THERMO-HYGROSTATS



Example thermostat NO



Example thermostat NC



Examples thermostat duals



Example hygostat



Example thermo-hygostat

Compact Design and High Capacity

We have all the solutions for thermostats and hygostats for racks and enclosures of small size, dual function, heat, cold,...

All of them easy to install; also reliable, economical and accurate. Adaptable to any ventilation unit or heat resistance of our catalogue to climate control cooling.

➔ [HAZ CLICK AQUÍ Y AMPLIA INFORMACIÓN](#)

APPLICATIONS

Specially designed for installation in our racks and enclosures.

FEATURES

- Various contact options NO or NC, dual, higostratos or thermo-hygostat.
- Maximum reliability and efficiency.
- Mounting on DIN rail 35 mm.
- Ecofriendly product.
- Colour RAL 7035.

NORMATIVE

- IP20 Norm IEC 60529.
- Built under directive 2006/95/CE low voltage.
- UL approved. File N° E348803.
- Mounting on DIN rail 35 mm EN 50022.

THERMOSTATS AND THERMO-HYGROSTATS

THERMOSTATS (MVKT001140 / MVKT001141)




Example thermostat NO
MVKT001140




Example thermostat NC
MVKT001141

Compact thermostat for DIN 35 mm. rail mounting.



Based on bimetallic junction, provides high capacity NO or NC contact.

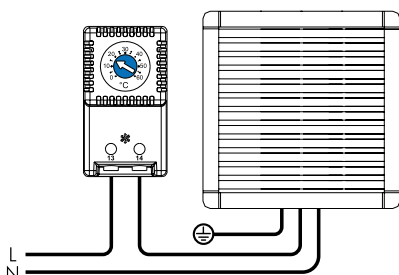


Contact NO (blue): Typically used for controlling ventilation devices

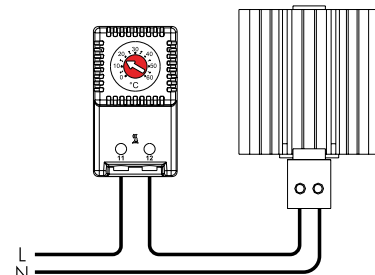


Contact NC (red): Typically used for controlling heaters




REFERENCES THERMOSTATS		
REFERENCE	MVKTMM1140	MVKTMM1141
CONTACT FUNCTION	NO	NC
TEMPERATURE SETTING RANGE	0 / +60 °C	
HYSTERESIS	7 °C (tolerance + / -4)	
MAX. SWITCHING CURRENT:		
250Vac RESISTIVE LOAD	10 A (1,6)	
125Vac RESISTIVE LOAD	15 A (2,5)	
MAX. SWITCHING CURRENT IN Vdc	30 W	
TEMPERATURE SENSOR TYPE	Thermostatic bimetal	
CONTACT TYPE	Snap action	
ELECTRICAL CONNECTIONS	2-pole terminal for 2,5 mm ² wire	
OPERATING TEMPERATURE	-25 / +80 °C	
STORAGE TEMPERATURE	-45 / +80°C	
INSTALLATION POSITION	Variable	
DIMENSIONS (height x width x depth)	61 x 34 x 35 mm	




MVKT001140



MVKT001141



35



34

THERMOSTATS AND THERMO-HYGROSTATS


THERMOSTAT DUAL (MVKT001142)



Example thermostat dual

Compact double thermostat for DIN 35 mm. rail mounting.





Based on bimetallic junction, provide high capacity and separated NO and NC contacts in different combinations.

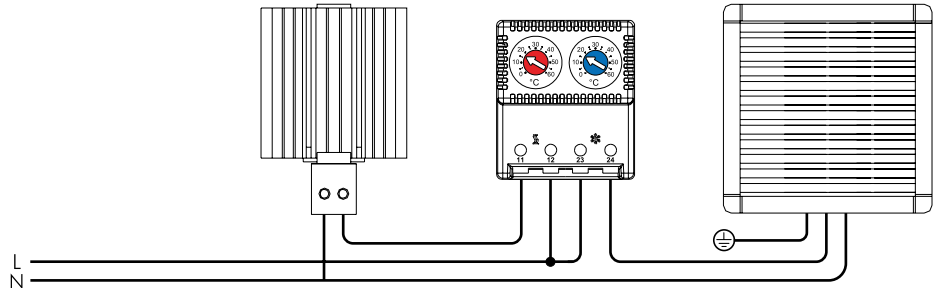

Contact NC (red): Typically used for controlling heaters
Contact NO (blue): Typically used for controlling ventilation devices

REFERENCE THERMOSTAT DUAL

REFERENCE	MVKTMM1142
CONTACT FUNCTION	NC / NO
TEMPERATURE SETTING RANGE	0 / +60°C
HYSTERESIS	7°C (tolerance + / -4)
MAX. SWITCHING CURRENT:	
250Vac RESISTIVE LOAD	10A (1,6)
125Vac RESISTIVE LOAD	15A (2,5)
MAX. SWITCHING CURRENT IN Vdc	30W
TEMPERATURE SENSOR TYPE	Thermostatic bimetal
CONTACT TYPE	Snap action
ELECTRICAL CONNECTIONS	2-pole terminal for 2,5 mm ² wire
OPERATING TEMPERATURE	-25 / +80 °C
STORAGE TEMPERATURE	-45 / +80 °C
INSTALLATION POSITION	Variable
DIMENSIONS (height x width x depth)	86 x 36 x 62,5 mm

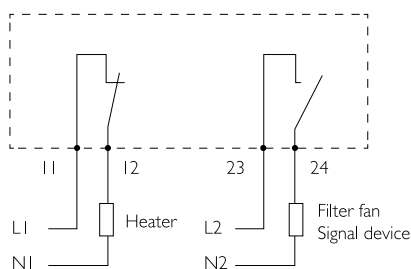




THERMOSTATS AND THERMO-HYGROSTATS

THERMOSTAT DUAL (MVKT205)



Example thermostat dual

The dual thermostat (MVKT205) has two control ranges for heating and cooling functions. In the lower adjustment range, the switching point for heating is selected, while in the upper adjustment range, the switching point for cooling is selected.

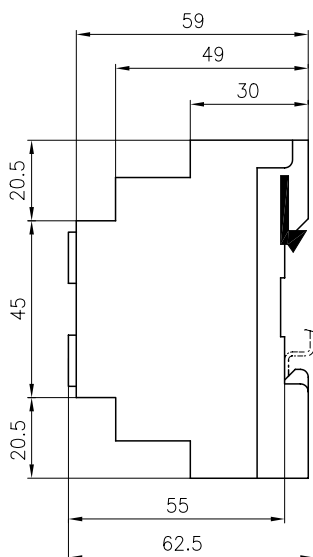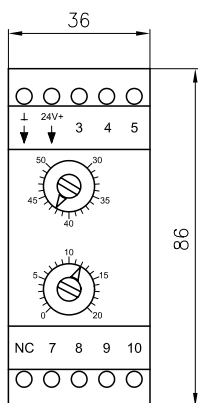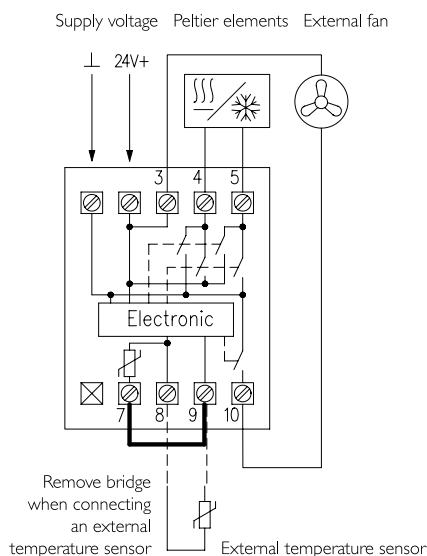

REFERENCE THERMOSTAT DUAL


REFERENCE	MVKT205
TENSIÓN DE ALIMENTACIÓN	24Vdc
TEMPERATURE SETTING RANGE:	
HEAT	0 / 20°C
COLD	30 / 50°C
HYSTERESIS	ca. 1K
MAX. SWITCHING CURRENT:	
OUTPUT PELTIER	16 A relay output
OUTPUT FAN	5 A relay output
INPUT	<1,5 W
SENSOR	Internal NTC (external as option)
PERMISSIBLE HUMIDITY	max. 95% rh, without condensation
DEGREE OF PROTECTION EN 60529	IP20
OPERATING TEMPERATURE	-10 / +50 °C
STORAGE TEMPERATURE	-20 / +70 °C
ELECTRICAL CONNECTIONS	Screw terminals 0,5 / ,25 mm ²
MOUNTING	DIN 35 mm rail mounting
DIMENSIONS (height x width x depth)	34 x 86 x 62,5 mm

THERMOSTATS AND THERMO-HYGROSTATS

HIGROSTAT (MVKH35)






Example higrostat



Compact higrostat for mounting on a 35 mm DIN rail. Based on bimetallic union.

REFERENCE HIGROSTATO	
REFERENCE	MVKH35
CONTACT TYPE	Change over contact
TEMPERATURE SETTING RANGE	0 / + 60 °C
PRECISION	±3 °C
HYSTERESIS	1 °C
MAX. SWITCHING CURRENT:	
NC 100-250Vac	10 A
NO 100-250Vac	5 A
MAX. SWITCHING POWER IN Vdc	30 W
TEMPERATURE SENSOR TYPE	Thermostatic bimetal
ELECTRICAL CONNECTIONS	4-pole terminal for 2,5 mm ² wire
DEGREE OF PROTECTION EN 60529	IP20
OPERATING TEMPERATURE	-40 / +80 °C
STORAGE TEMPERATURE	-45 / +80 °C
INSTALLATION POSITION	Variable
DIMENSIONS (height x width x depth)	64 x 37 x 45 mm




THERMOSTATS AND THERMO-HYGROSTATS

THERMO-HYGROSTAT (MVKT001143)




Example thermo-hygrostat



Electronic thermo-hygrostat for DIN 35 mm rail mounting, with LED display of power on and status. Typically used to control enclosure heaters and the change over contact triggers either for high humidity or low temperature, independently set adjustable.

REFERENCES THERMO-HYGROSTAT

REFERENCE	MVKTMM1143B	MVKTMM1143A
POWER SUPPLY	115V / 50-60Hz	230V / 50-60Hz
TEMPERATURE SETTING RANGE	0 / +60 °C	
REGULATION OF RELATIVE HUMIDITY	20 - 90 RH%	
HYSTERESIS OF RELATIVE HUMIDITY	5 %	
REACTION TIME	60 seg	
MAX. SWITCHING CURRENT:		
NO 250Vac RESISTIVE LOAD	10A	
NO A 30Vdc RESISTIVE LOAD	8A	
NO A 240Vac MOTOR LOAD	1 / 2 Hp	
NO A 120Vac MOTOR LOAD	1 / 4 Hp	
NC 250Vac RESISTIVE LOAD	10A	
NC A 30Vdc RESISTIVE LOAD	8A	
OPTICAL SIGNAL	LED	
CONTACT RESISTANCE	< 10	
CONTACT TYPE	Change over	
ELECTRICAL CONNECTIONS	5-pole terminal for 2,5 mm ² wire	
DEGREE OF PROTECTION EN 60529	IP20	
OPERATING / STORAGE TEMPERATURE	-40 / +80 °C	
INSTALLATION POSITION	Vertical	
DIMENSIONS (height x width x depth)	69 x 53 x 50 mm	

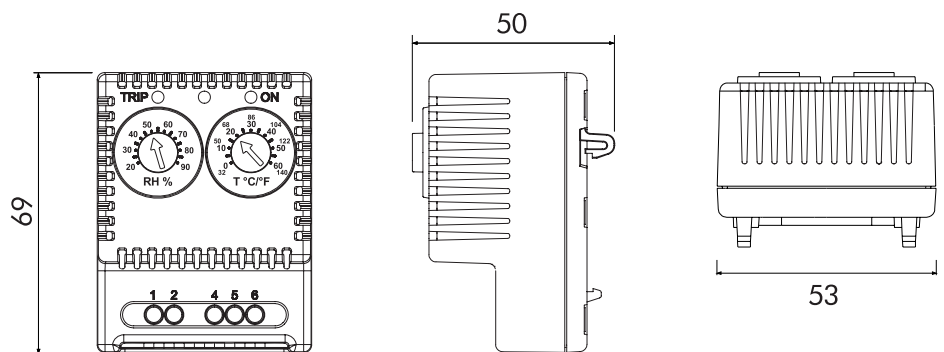

OTHER ELEMENTS OF VENTILATION AND CLIMATE CONTROL

DELVALLE, EXPERTS IN VENTILATION AND CLIMATE CONTROL

One solution for every need. Our engineers equipment will find the best climate control installation and get a better performance and greater energy and cost savings



AIR
CONDITIONERS



THERMOELECTRIC
COOLERS

TEMPERATURE CONTROL



FILTER FANS



RESISTANCE HEATERS

CUSTOMIZED ENCLOSURE SOLUTIONS DELVALLE

Delvalle has more than 50 years of experience using the latest technology to implement and obtain the most innovative products on offer to all our customers. Delvalle is an ideal partner, combining an advanced and wide range of products at very competitive prices.

The customized manufacture of all electrical enclosures and cabinets Delvallebox is carry out with the most advanced technical methods and with the precision and consciousness of a craftsman. This makes the difference from competitors and is the best way to gain our customers' trust.

In Delvallebox we bear in mind that customers perceive the quality very clearly. In every product (for instance, in the cabinets here presented) safety and useful solutions are what customers value most.



STAINLESS STEEL
INDUSTRIAL ENCLOSURES



OUTDOOR ELECTRICAL
ENCLOSURES



GLOBAL ELECTRICAL
SOLUTIONS FOR URBAN AREAS



GALVANIZED STEEL
ELECTRICAL ENCLOSURES

ATEX INDUSTRIAL ENCLOSURES



SLOPED ROOF
ENCLOSURES - HYGIENIC



INDUSTRIAL ENCLOSURES IP66, IP67, IP68 AND IP69K

Buy direct from manufacturer of custom made IP66, IP67, IP68 and IP69K heavy duty industrial and waterproof electrical enclosures AISI 304L and 316L made by standard IEC 60529. Delvalle has tested all sizes and dimensions of waterproof enclosures according to EN 60529:2018. All weather resistant enclosures are more than simply rainproof, they meet a minimum of Nema 4X and IP66, IP67, IP68 and IP69k requirements to ensure your electronics are protected. From Junction boxes to industrial enclosures, Delvalle weatherproof enclosures offer a wide range of sizes and styles to keep your project waterproof.



CLIMATE CONTROL COOLING FOR ENCLOSURES



CABLE GLANDS FOR
ELECTRICAL ENCLOSURES





Paso del Prao, 6. 01320 Oyón (Álava). Spain
Phone +34 945 601 381
comercial@delvalle.es | www.delvallebox.com
Contact us, we will be available at any time

